



# Operation under high pressure

Specially adapted automatic basket strainer  
for pressures up to 1,160 psi

**Location:**

Innertkirchen, Switzerland

**Challenge:**

Protecting a control valve against abrasion from glaciers and suspended matter in a hydroelectric power station by installing an automatic basket strainer in the supply line, and operating pressure of up to 1,450 psi while providing the highest possible degree of precision in the strainer element

**Solution:**

Modification of the Eaton Model 2596 automatic basket strainer with a new, stronger housing, special four-fold mechanical seal on the flushing arm drive shaft, reinforced filter element and pressure reduction in the backwash tube

**Result:**

Minimized wear in the sliding gate valves, reduction of downtime and maintenance costs

*"Until now, the valves had to be cleaned and repaired by the KWO every three to four months. An automatically self-cleaning filter is the more economical solution. A particularly challenging problem was to find a filter element that offers the highest possible filter fineness that could also withstand the high pressures and was backwashable."*

*Franz Christen,  
Sales and Technical Manager  
BT-Hydraulik AG*

**Background**

The Kraftwerke Oberhasli AG power plant (KWO) can generate energy on demand at any time using water dammed in the Grimselsee, 1909 meters above sea level. The Swiss energy company makes an important contribution to generating electricity and stabilizing the grid in Switzerland and Europe from its hydroelectric power plants in the Grimsel area.

In addition, reservoirs act as natural batteries in which energy can be stored in the form of water and later used to generate electricity. However, the use of natural glacial runoff and rainwater poses a problem -suspended matter. The glacier is continuously eroding very fine stone particles from the mountains. These solids, derived from glacial abrasion, are transported by the runoff into the reservoir and collect there together with other suspended matter brought in by rainfall. These 25 to 200 micron particles pose a problem for the huge turbines in the KWO power plants, as they cause heavy wear of the slide valves.

These valves use the pressure of the water to control the ball valves which, in turn, control the intake to the turbines. Due to the water's drop height of 670 meters, very high pressures occur in the valves and their supply lines.

**Challenge**

Sand settling tanks are in place upstream, which prevent the entry of coarse particles into the control valves, however they have demonstrated only limited success. "Until now, the valves had to be cleaned and repaired by the KWO every three to four months," explains Franz Christen, Sales and Technical Manager at BT-Hydraulik AG, which was commissioned by KWO to find a solution to the problem. In the past, the valves even had to be completely replaced on a regular basis, but now they are no longer available on the market. In order to reduce or, ideally, eliminate costly and time-consuming repairs, the hydroelectric power plant operator was interested in finding a new solution. "The installation of larger settling tanks was not an option," continues Christen.



Powering Business Worldwide

"At water pressures of 870 psi, 1,160 psi or even more than 1,450 psi, very large and complex tanks would be needed. But that would not be feasible for economic and environmental reasons, and for lack of space. Converting to oil hydraulics was likewise not feasible for the same reasons." Therefore, KWO decided to install filter systems directly upstream of the control valves and turned to BT-Hydraulik, a leading company in the field of hydraulic drive technology.

The experts from the Berne-based company advised KWO to use an automatic basket strainer. "Conventional filters clog up over time and need to be serviced and replaced at regular intervals," Christen explains. "An automatically self-cleaning filter is the more economical solution." The problem is that standard backwash filters are not designed for the high pressures in a hydroelectric power plant. BT-Hydraulik, together with Eaton, continued to work on refining the Eaton Model 2596 strainer. This motor-driven strainer provides continuous removal of solids from fluids in pipework systems - though only within a standard pressure range up to a maximum of 232 psi. However, Eaton provides customization of this filter system to serve customer-specific applications.

### Solution

A version of the Eaton Model 2596 automatic basket strainer was developed for KWO that is designed for pressures of up to 1,160 psi. However, a variety of measures were required to make this possible: First of all, in order to withstand the high pressures, Eaton modified the entire housing by increasing the wall thickness and making the cover considerably sturdier. In addition, the flushing arm drive shaft was sealed with a quadruple mechanical seal.

"A particularly challenging problem was to find a filter element that offers the highest possible filter fineness that could also withstand the high pressures and was backwashable," says Christen. A reinforced version of the DuraWedge® filter elements proved the solution: Made of V-shaped stainless steel wire profiles, even the standard version is capable of being used in demanding applications. After being further reinforced, they now can withstand the high pressures in the hydroelectric power plant, filtering out a large part of the suspended matter due to a filter fineness of 25 µm. "However, the system had to be additionally adjusted so that the screen baskets would not be deformed in the backwash phase," explains Christen. "A pressure reduction of 870 psi to the ambient pressure would have been problematic despite the reinforcement."

The high-pressure basket strainers used in KWO's hydroelectric power plant - so far there are four - have also been adapted to the operating parameters used there. The connector size for two of the filters is 2 inches and for the other two is 3 inches, with a flow rate of between 53 and 106 gallons per minute. However, the design of the high-pressure strainer basket developed jointly by Eaton and BT-Hydraulik can also be adapted to other parameters - in line with whatever the application requires. The backwash is triggered by an Eaton control - in KWO's case, whenever the differential pressure reaches 11.6 psi. Alternatively, control using predetermined time intervals or permanent backwashing would also be feasible.


### Result

Even though the test phase of the new filter system at KWO is scheduled to run for several years, initial results are already clear. "The results are very good," says KWO. "So far we have had no outages and the system perfectly meets our needs in terms of maintaining and cleaning the baskets." Especially compared to the turbine lines where the sliding gate valves have not yet been retrofitted, it is clear that wear and tear has been significantly reduced - the amount of maintenance required and the associated costs have been minimized by the high-pressure automatic basket strainer.



**Eaton Model 2596 automatic self-cleaning strainer – picture shows special version for pressures up to 1,450 psi.**

This strainer is designed for continuous, uninterrupted removal of entrained solids from liquids in pipeline systems. Model 2596 strainers are available in different sizes from DN50 to DN900 (standard pressure ratings PN10/PN16), with automatic backwash and a broad selection of screen options.

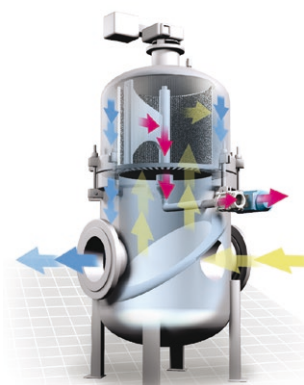

**North America**  
44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

**Europe/Africa/Middle East**  
Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0

Friedensstraße 41  
68804 Altlussheim, Germany  
Tel: +49 6205 2094-0  
  
An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

**China**  
No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

**Singapore**  
100G Pasir Panjang Road #07-08  
Singapore 118523  
Tel: +65 6825-1668

**Brazil**  
Av. Ermano Marchetti, 1435 -  
Água Branca, São Paulo - SP  
05038-001, Brazil  
Tel: +55 11 3616-8461

**For more information, please  
email us at [filtration@eaton.com](mailto:filtration@eaton.com)  
or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)**

© 2019 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US  
05-2019