




# Wilden® VS WARREN RUPP®

PS8 51 mm (2") Pro-Flo® SHIFT 2" Warren Rupp® Sandpiper® Alum.

In controlled laboratory testing witnessed by a panel of engineers, pump experts, and industry professionals, competitive pumps were tested and judged against the revolutionary patent pending Pro-Flo® SHIFT. The witnesses were asked to select a common operating parameter they see in the field (2.1 bar (30 psig) fluid head pressure and a flow requirement of 320 lpm (85 gpm)). We ran each pump at the inlet air pressure required to meet the flow requirement set by the witnesses and recorded the air consumption. We think you'll find the results compelling.

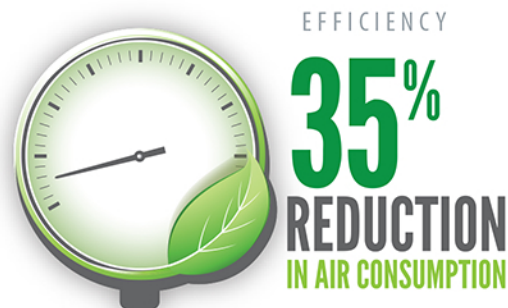

## PERFORMANCE

**54%**  
INCREASE  
IN PRODUCTIVITY  
VS. THE COMPETITION  
USING THE SAME COMPRESSOR



## Efficiency Comparison

	Wilden® PS8 Pro-Flo® SHIFT	2" Warren Rupp® Sandpiper® Alum.
Flow rate*	320 lpm (85 gpm)	320 lpm (85 gpm)
Air consumption in SCFM	42.6	65.8
Strokes per minute (maintenance indicator)	120	210
Fluid pumped per SCFM (used to judge efficiency)	7.57 lpm (2.00 gpm)	4.88 lpm (1.29 gpm)
Reduced air consumption over competition by	35%	
Air consumption increase over Pro-Flo® SHIFT		54%
Annual savings to run 10 pumps	\$38,182.42	
Increase in productivity by using Pro-Flo® SHIFT versus the Competition	54%	

\* selected by a group of experts as a common parameter in the field

Make the SHIFT to Pro-Flo® SHIFT  
and **Experience**

- Higher productivity with reduced energy
- Easily reduce your carbon footprint
- Additional product yield offers great capacity and scalability
- Proven Pro-Flo technology
- ATEX compliant
- No additional setup or hard to read curves



See the proof at  
<http://www.profloshift.com/video/head-to-head/wr-sandpiper-alum>

Sandpiper® is a registered trademark of Warren Rupp, Inc.

**WILDEN®**  
Part of Pump Solutions Group  
A DOVER COMPANY

[wildenpump.com](http://wildenpump.com)